Drive Bay Unit for 4E-Series Chassis

PC-DBU2 User's Manual

CONTEC CO.,LTD.

Thank you for purchasing the PC-DBU2.

The product consists of the items listed below. Check, with the following list, that your package is complete. If you discover damaged or missing items, contact your retailer.

Product Configuration List

- Unit[PC-DBU2]…1
- Screws(M3 x 6)…4
- Universal bushing…1
- User's Manual(this Manual)…1



Unit



Universal bushing



User's Manual

About the Unit

The PC-DBU2 is a 5-inch drive bay unit for CONTEC's FA-UNIT-M4BE and FA-UNIT-H4BE chassis.

Installing the drive bay unit on the FA-UNIT-M4BE/H4BE allows the chassis to accommodate one 5-inch drive.

Features

Installing the PC-DBU2 on the FA-UNIT-M4BE/H4BE provides the chassis with a bay for one 5-inch drive.

Specification

Item	Specification
Drive to be mounted	5-inch drive x 1
External dimensions(mm)	60(W) x 247(D) x 177(H)
Weight	About 1.3kg (not including the drive)
Acceptable chassis	FA-UNIT-M4BE, FA-UNIT-H4BE

Installation

Follow the relevant procedure below to install the product on the FA-UNIT-M4BE/H4BE.

Before installation

(1) Turn off the power switch on the chassis.

(2) Unplug the power cable of the system unit from the wall outlet.

Attaching the PC-DBU2 to the FA-UNIT-M4BE

(1) Remove the screws fastening the top cover, then remove the cover. For these screws, use an appropriate-size screwdriver that fits in the slits in their head.



(2) Remove the expansion board stopper bar and the 3.5-inch drive bay.

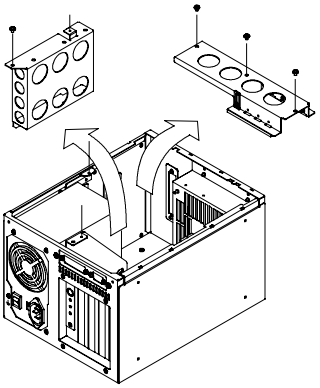

(3) Remove the lid of the cable hole in a side panel of the chassis and attach the universal bushing (included in the PC-DBU2 package) for cable protection.

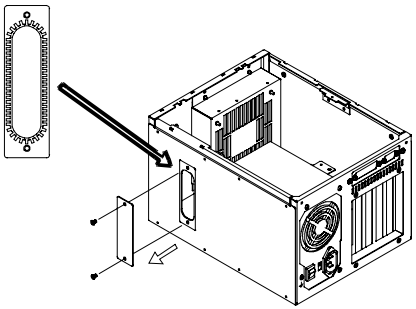

(4) Attach the PC-DBU2 and a 5-inch drive as illustrated below, then connect the required cables. Attach the lid removed in step (3) above to the back panel of the PC-DBU2.

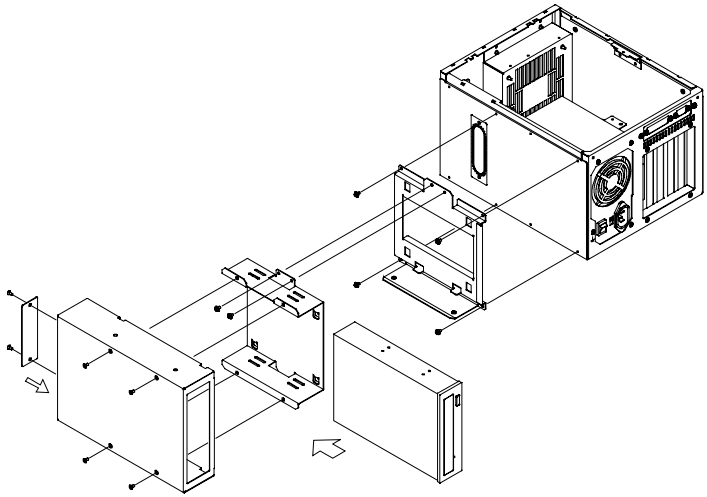

(5) Put the stopper bar, 3.5-inch drive bay, and cover back in place by fastening them with the screws.

Attaching the PC-DBU2 to the FA-UNIT-H4BE

To install the product on the FA-UNIT-H4BE, follow the same procedure as for the FA-UNIT-M4BE.

External dimensions

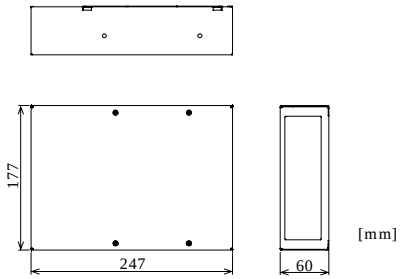

Figure 1 External dimensions

FA-UNIT-M4BE with PC-DBU2 Attached

Attaching the PC-DBU2 to the FA-UNIT-M4BE causes the chassis to grow by 60 mm in width.

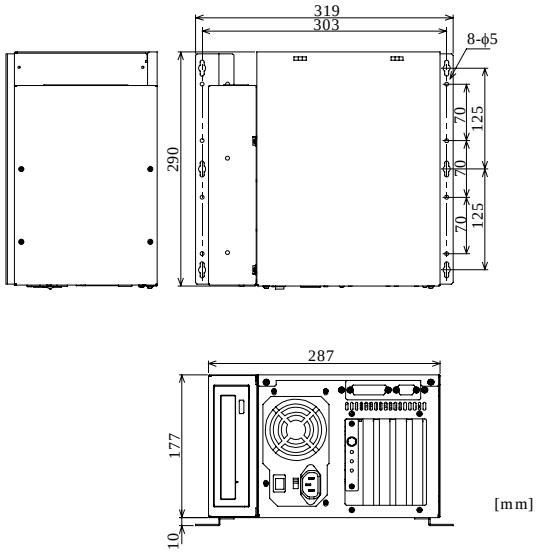

Figure 2 Dimensional Drawing of FA-UNIT-M4BE with PC-DBU2

FA-UNIT-H4BE with PC-DBU2 Attached

Attaching the PC-DBU2 to the FA-UNIT-H4BE causes the chassis to grow by 60 mm in width.

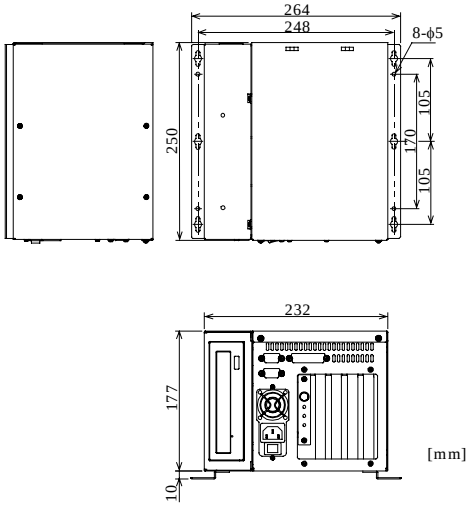

Figure 3 Dimensional Drawing of FA-UNIT-H4BE with PC-DBU2

Safety Precautions

Understand the following definitions and precautions to use the product safely.

Handling Precautions

⚠ CAUTION

- Turn off the power switch on the chassis before attaching this product.
- Do not modify this product.
  CONTEC will bear no responsibility for any problems, etc., resulting from modifying the product.
- CONTEC CO., LTD. makes no commitment to update or keep current the information contained in this document. The information in this document is subject to change without notice.
- All relevant issues have been considered in the preparation of this document. Should you notice an omission or any questionable item in this document, please feel free to notify CONTEC CO., LTD.
- Regardless of the foregoing statement, CONTEC assumes no responsibility for any errors that may appear in this document or for results obtained by the user as a result of using this product.

PC-DBU2

User's Manual

CONTEC CO., LTD.
August 2005 Edition

3-9-31, Himesato, Nishiyodogawa-ku, Osaka 555-0025, Japan
Japanese http://www.contec.co.jp/
English http://www.contec.com/
Chinese http://www.contec.com.cn/

No part of this document may be copied or reproduced in any form by any means without prior written consent of CONTEC CO., LTD. [08022005]

[08022005]
Management No. A-51-087
Parts No. LYFF261